



Defender™ Bases

Painted and Stainless Steel Scale Bases



"W", "H" and "Q"
bases are
NTEP Certified

Durable Industrial and Basic Bench Scale Bases

Building on the success of the Champ™ series of bench scales, the new OHAUS Defender™ Bases offer two levels of durability for the most demanding industrial applications. All Defender Bases offer removable stainless steel weighing pans, IP67 protected single-point loadcells, steel construction, non-slip adjustable feet and integral leveling bubbles.

For standard industrial applications, the Defender Square, Rectangular and Square Washdown Scale Bases (Q, H and W models) offer the same folded and welded steel plate construction found in the popular Champ and Champ II series. With NTEP certification, these bases can be used for both general applications as well as where legal-for-trade performance is required. For basic use where budget is more of an issue, the Defender Basic Rectangular Bases (B and V models) – available in dry-use and washdown models – offer durable welded tubular steel construction for economical yet durable performance.

Standard Features Include:

- Removable stainless steel weighing pans
- Steel frame construction with stainless steel for Washdown models, painted carbon steel for other models
- NEMA 4X / IP67 protected single point loadcells, with stainless steel loadcells for Washdown models, aluminum loadcells for other models
- Adjustable, non-slip rubber leveling feet and leveling bubble
- NTEP 5,000 performance for Defender Washdown Square and Square Bases (W and Q models), NTEP 2000 - 3,000 performance for Defender Rectangular Bases (H models)

Defender™ Bases Painted and Stainless

Defender Square Washdown Bench Scale Bases

Model	D10WR	D25QWR	D50WL	D100WL	D250WX
Capacity (max) x Readability (d)	25 lb x 0.002 lb 10 kg x 1 g	50 lb x 0.005 lb 25 kg x 2 g	100 lb x 0.01 lb 50 kg x 5 g	250 lb x 0.02 lb 100 kg x 10 g	500 lb x 0.05 lb 250 kg x 20 g
NTEP Capacity (max) x Certified Readability	25 lb x 0.005 lb 10 kg x 0.002 kg	50 lb x 0.01 lb 25 kg x 0.005 kg	100 lb x 0.02 lb 50 kg x 0.01 kg	250 lb x 0.05 lb 100 kg 0.02 kg	500 lb x 0.10 lb 250 kg x 0.05 kg
Maximum Certified Resolution	1:5,000	1:5,000	1:5,000	1:5,000	1:5,000
Load Cell Cable	8.25 ft. / 2.5 m L x 6-wire				
Load Cell Rated Output	2 mV/V ± 10%				
Load Cell Excitation Voltage	Maximum 20V (AC/DC) / Recommended 5~15V (AC/DC)				
Load Cell Input / Output Resistance	387 ± 10 ohms / 350 ± 4 ohms				
Leveling Components	Externally visible level bubble and adjustable non-slip leveling feet				
Operating Temperature	14°F to 104°F / -10°C to 40°C				
Base Dimensions (A x B x C x D x E) (refer to dimensional drawing)	12 x 12 x 3.7 x 2 x 13.2 in 305 x 305 x 95 x 52 x 335 mm		18 x 18 x 4.5 x 2.8 x 19.2 in 457 x 457 x 115 x 70 x 487 mm		24 x 24 x 5.4 x 3.5 x 25.2 in 610 x 610 x 137 x 90 x 640 mm
Shipping Dimensions (L x W x H)	19.3 x 16.1 x 17.3 in 490 x 410 x 440 mm		31.2 x 23.6 x 9.5 in 810 x 600 x 240 mm		39.4 x 29.9 x 9.8 in 1000 x 760 x 250 mm
Net Weight	26.9 lb / 12.2 kg		60 lb / 27.2 kg		77 lb / 35 kg
Shipping Weight	31.3 lb / 14.2 kg		64 lb / 29 kg		90 lb / 41 kg

NTEP CC No. 01-048A1

Features:

- Square Pan
- All 304 Stainless Steel Design
- Weld/Fold Steel Plate Base (R, L sizes)
- Stainless Steel IP67 Loadcell
- 150% Safe Overload Capacity
- 10,000-12,500d
- NTEP 5,000e Certified

Defender Square Bench Scale Bases

Model	D10QR	D25QR	D50QL	D100QL	D250QX
Capacity (max) x Readability (d)	25 lb x 0.002 lb 10 kg x 1 g	50 lb x 0.005 lb 25 kg x 2 g	100 lb x 0.01 lb 50 kg x 5 g	250 lb x 0.02 lb 100 kg x 10 g	500 lb x 0.05 lb 250 kg x 20 g
NTEP Capacity (max) x Certified Readability	25 lb x 0.005 lb 10 kg x 0.002 kg	50 lb x 0.01 lb 25 kg x 0.005 kg	100 lb x 0.02 lb 50 kg x 0.01 kg	250 lb x 0.05 lb 100 kg 0.02 kg	500 lb x 0.10 lb 250 kg x 0.05 kg
Maximum Certified Resolution	1:5,000	1:5,000	1:5,000	1:5,000	1:5,000
Load Cell Cable	8.25 ft. / 2.5 m L x 6-wire				
Load Cell Rated Output	2 mV/V ± 10%				
Load Cell Excitation Voltage	Maximum 20V (AC/DC) / Recommended 5~15V (AC/DC)				
Load Cell Input / Output Resistance	410 ± 10 ohms / 350 ± 4 ohms				
Leveling Components	Externally visible level bubble and adjustable non-slip leveling feet				
Operating Temperature	14°F to 104°F / -10°C to 40°C				
Base Dimensions (A x B x C x D x E) (refer to dimensional drawing)	12 x 12 x 3.7 x 2 x 13.2 in 305 x 305 x 95 x 52 x 335 mm		18 x 18 x 4.5 x 2.8 x 19.2 in 457 x 457 x 115 x 70 x 487 mm		24 x 24 x 5.4 x 3.5 x 25.2 in 610 x 610 x 137 x 90 x 640 mm
Shipping Dimensions	19.3 x 16.1 x 17.3 in 490 x 410 x 440 mm		31.2 x 23.6 x 9.5 in 810 x 600 x 240 mm		39.4 x 29.9 x 9.8 in 1000 x 760 x 250 mm
Net Weight	26.9 lb / 12.2 kg		60 lb / 27.2 kg		77 lb / 35 kg
Shipping Weight	31.3 lb / 14.2 kg		64 lb / 29 kg		90 lb / 41 kg

NTEP CC No. 01-048A1

Features:

- Square 304 Stainless Steel Pan
- Painted Carbon Steel Frame
- Weld/Fold Steel Plate Base (R, L sizes)
- Aluminum IP67 Loadcell
- 150% Safe Overload Capacity
- 10,000-12,500d
- NTEP 5,000e Certified

Defender Rectangular Bench Scale Bases

Base Model: H Series	D15HR	D30HR	D60HR	D60HL	D100HL	D150HX	D300HX
Capacity (max) x Readability (d)	30lb x 0.005lb 15kg x 2g	60lb x 0.01lb 30kg x 5g	150lb x 0.02lb 60kg x 10g	150lb x 0.02lb 60kg x 10g	250lb x 0.05lb 100kg x 20g	300lb x 0.05lb 150kg x 20g	600lb x 0.1lb 300kg x 50g
NTEP Capacity (max) x Certified Readability	30lb x 0.01lb 15kg x 0.005kg	60lb x 0.02lb 30kg x 0.01kg	150lb x 0.05lb 60 x 0.02 kg	150lb x 0.05lb 60kg x 0.02kg	250lb x 0.1lb 100kg x 0.05kg	300lb x 0.1lb 150kg x 0.05kg	600lb x 0.2lb 300kg x 0.1kg
Maximum Certified Resolution	1:3000	1:3000	1:3000	1:3000	1:2000	1:3000	1:3000
Load Cell Cable	6.6 ft / 2 m L x 6-wire						
Load Cell Rated Output	2 mV/V ± 10%						
Load Cell Excitation Voltage	Maximum 20V (AC/DC) / Recommended 5~15V (AC/DC)						
Load Cell Input / Output Resistance	410 ± 10 ohms / 350 ± 4 ohms						
Leveling Components	Externally visible level bubble and adjustable non-slip leveling feet						
Operating Temperature	14°F to 104°F / -10°C to 40°C						
Base Dimensions (A x B x C x D x E) (refer to dimensional drawing)	14 x 12 x 3.7 x 2 x 15 in 355 x 305 x 95 x 50 x 380 mm		19.7 x 15.7 x 4.1 x 2.4 x 20.9 in 500 x 400 x 105 x 60 x 530 mm		21.7 x 16.5 x 4.9 x 2.8 x 22.8 in 550 x 420 x 125 x 70 x 580 mm		
Shipping Dimensions (L x W x H)	19.3 x 16.1 x 17.3 in 490 x 410 x 440 mm		29.1 x 27.2 x 9.1 in 740 x 690 x 230 mm		29.5 x 28 x 9.1 in 750 x 710 x 230 mm		
Net Weight	20 lb / 9 kg		42 lb / 19 kg		54 lb / 24.5 kg		
Shipping Weight	24 lb / 11 kg		48.5 lb / 22 kg		59.5 lb / 27 kg		

NTEP CC No. 99-203A3

Features:

- Rectangular 304 Stainless Steel Pan
- Painted Carbon Steel Frame
- Weld/Fold Steel Plate Base (R, L sizes)
- Aluminum IP67 Loadcell
- 150% Safe Overload Capacity
- 6,000-7,500d
- NTEP 2,500e - 3,000e Certified

Steel Scale Bases

Defender Basic Rectangular Washdown Bases

Models	D30VR	D60VR	D60VL	D150VL	DB150VX	DB300VX
Capacity (max) x Readability (d)	60 lb x 0.01 lb 30 kg x 5 g	150 lb x 0.02 lb 60 kg x 10 g	150 lb x 0.02 lb 60 kg x 10 g	300 lb x 0.05 lb 150 kg x 20 g	300 lb x 0.05 lb 150 kg x 20 g	600 lb x 0.1 lb 300 kg x 50 g
Load Cell Cable	6.6 ft / 2m L x 6-wire					
Load Cell Rated Output	2 mV/V ± 10%					
Load Cell Excitation Voltage	Maximum 20V (AC/DC) / Recommended 5-15V (AC/DC)					
Load Cell Input / Output Resistance	410 ± 10 ohms / 350 ± 4 ohms					
Leveling Components	Externally visible level bubble and adjustable non-slip leveling feet					
Operating Temperature	-10°C to 40°C / 14°F to 104°F					
Base Dimensions (A x B x C x D x E)	14 x 12 x 4.8 x 3 x 15 in 355 x 305 x 123 x 75 x 380 mm	21.6 x 16.5 x 5.4 x 3.1 x 22.6 in 550 x 420 x 136 x 80 x 575 mm	21.6 x 16.5 x 5.4 x 3.1 x 22.6 in 550 x 420 x 136 x 80 x 575 mm	25.6 x 19.7 x 5.6 x 3.5 x 26.6 in 650 x 500 x 143 x 90 x 675 mm	25.6 x 19.7 x 5.6 x 3.5 x 26.6 in 650 x 500 x 143 x 90 x 675 mm	25.6 x 19.7 x 5.6 x 3.5 x 26.6 in 650 x 500 x 143 x 90 x 675 mm
Shipping Dimensions (L x W x H)	25.3 x 19.6 x 8.5 in / 642 x 497 x 212 mm	33.7 x 22.2 x 8.9 in / 857 x 564 x 225 mm	33.7 x 22.2 x 8.9 in / 857 x 564 x 225 mm	40.2 x 27 x 9.7 in / 1022 x 687 x 247 mm	40.2 x 27 x 9.7 in / 1022 x 687 x 247 mm	40.2 x 27 x 9.7 in / 1022 x 687 x 247 mm
Net Weight	20 lb / 9 kg	46 lb / 21 kg	46 lb / 21 kg	73 lb / 33 kg	73 lb / 33 kg	73 lb / 33 kg
Shipping Weight	24 lb / 11 kg	53 lb / 24 kg	53 lb / 24 kg	81.5 lb / 37 kg	81.5 lb / 37 kg	81.5 lb / 37 kg

Features:

- Rectangular Pan
- All 304 Stainless Steel Design
- Tubular Steel Frame
- Stainless Steel IP67 Loadcell
- 125% Safe Overload Capacity
- 6,000-7,500d


Defender Basic Rectangular Bases

Models	D30BR	D60BR	D60BL	D150BL	DB150BX	DB300BX
Capacity (max) x Readability (d)	60 lb x 0.01 lb 30 kg x 5 g	150 lb x 0.02 lb 60 kg x 10 g	150 lb x 0.02 lb 60 kg x 10 g	300 lb x 0.05 lb 150 kg x 20 g	300 lb x 0.05 lb 150 kg x 20 g	600 lb x 0.1 lb 300 kg x 50 g
Load Cell Cable	6.6 ft / 2 m L x 6-wire					
Load Cell Rated Output	2 mV/V ± 10%					
Load Cell Excitation Voltage	Maximum 20V (AC/DC) / Recommended 5-15V (AC/DC)					
Load Cell Input / Output Resistance	410 ± 10 ohms / 350 ± 4 ohms					
Leveling Components	Externally visible level bubble and adjustable non-slip leveling feet					
Operating Temperature	-10°C to 40°C / 14°F to 104°F					
Base Dimensions (A x B x C x D x E)	14 x 12 x 4.8 x 3 x 15 in 355 x 305 x 123 x 75 x 380 mm	21.6 x 16.5 x 5.4 x 3.1 x 22.6 in 550 x 420 x 136 x 80 x 575 mm	21.6 x 16.5 x 5.4 x 3.1 x 22.6 in 550 x 420 x 136 x 80 x 575 mm	25.6 x 19.7 x 5.6 x 3.5 x 26.6 in 650 x 500 x 143 x 90 x 675 mm	25.6 x 19.7 x 5.6 x 3.5 x 26.6 in 650 x 500 x 143 x 90 x 675 mm	25.6 x 19.7 x 5.6 x 3.5 x 26.6 in 650 x 500 x 143 x 90 x 675 mm
Shipping Dimensions (L x W x H)	25.3 x 19.6 x 8.5 in / 642 x 497 x 212 mm	33.7 x 22.2 x 8.9 in / 857 x 564 x 225 mm	33.7 x 22.2 x 8.9 in / 857 x 564 x 225 mm	40.2 x 27 x 9.7 in / 1022 x 687 x 247 mm	40.2 x 27 x 9.7 in / 1022 x 687 x 247 mm	40.2 x 27 x 9.7 in / 1022 x 687 x 247 mm
Net Weight	20 lb / 9 kg	35 lb / 16 kg	35 lb / 16 kg	62 lb / 28 kg	62 lb / 28 kg	62 lb / 28 kg
Shipping Weight	24 lb / 11 kg	42 lb / 19 kg	42 lb / 19 kg	70.5 lb / 32 kg	70.5 lb / 32 kg	70.5 lb / 32 kg

Features:

- Rectangular 304 Stainless Steel Pan
- Painted Carbon Steel Frame
- Tubular Steel Base
- Aluminum IP67 Loadcell
- 125% Safe Overload Capacity
- 6,000-7,500d

Outline Dimensions

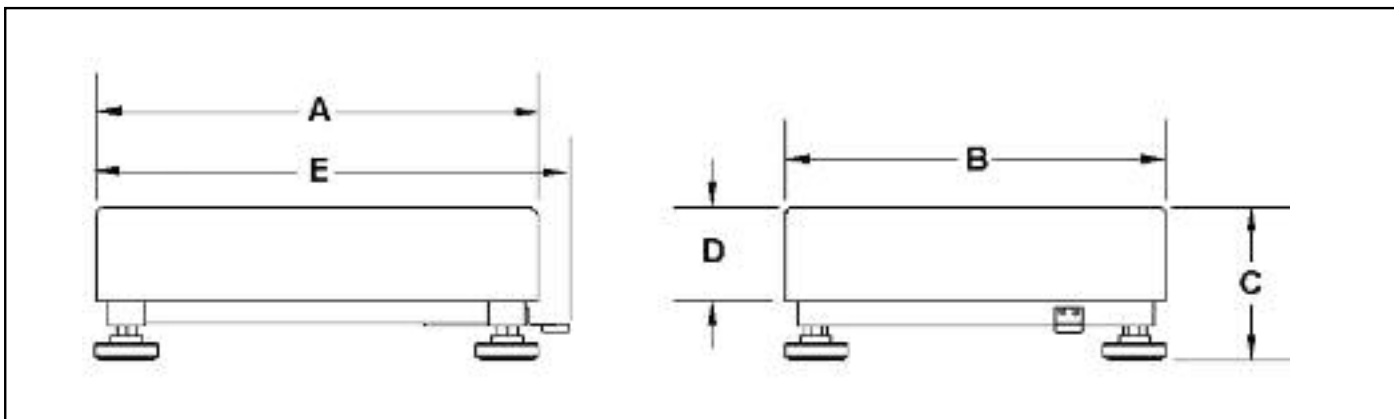

Defender™ Scale Bases

Standard Features:

Defender Washdown Square, Square and Rectangular Bases

Durable Base Frame Construction

Stainless steel pans and stainless or painted form-and-weld frames (R, L sizes) provide maximum durability, rigidity and structural integrity. Load-unload cycle tested to ensure long-term performance.



Fully Adjustable Feet

Four rugged, adjustable feet help prevent slippage on wet or uneven surfaces

Level Bubble Included

Removable Stainless Steel Pans

For quick cleaning, all bases come with removable stainless steel pans

Base Construction

Defender Square Washdown Bases feature all stainless steel construction - pans, basework and loadcells, for complete washdown protection. Defender Square and Rectangular Bases are made from painted carbon steel with stainless steel pans and aluminum loadcells.

IP67 Loadcells

For added durability, all loadcells are protected to IP67 against water and condensation



Defender Basic Washdown Rectangular and Rectangular Bases

IP67 Loadcells

For added durability, all loadcells are protected to IP67 against water and condensation

Removable Stainless Steel Pans

For quick cleaning, all bases come with removable stainless steel pans

Durable Base Frame Construction

Defender Basic Rectangular Bases are made from welded tubular steel, providing economical durability for industrial applications. Load-unload cycle tested to ensure long-term performance.



Level Bubble Included

Base Construction

Defender Basic Washdown Bases also feature all stainless steel construction. Defender Basic Rectangular Bases are made from painted carbon steel with stainless steel pans and aluminum loadcells.

Fully Adjustable Feet

Four rugged, adjustable feet help prevent slippage on wet or uneven surfaces



Options and Accessories

Mounting Accessories

	OHAUS Number
Base Mount Kit, T51P	80500722
Column Mount Kit, 13.75in/35cm, painted, T31P/T31XW	80251743
Column Mount Kit, 26.75in/70cm, painted, T31P/T31XW	80251744
Column Mount Kit, 13.75in/35cm, stainless steel, T31P/T31XW	80251745
Column Mount Kit, 26.75in/70cm, stainless steel, T31P/T31XW	80251746
Column Mount Kit, 13.75in/35cm, painted, T51P/T51XW	80500723
Column Mount Kit, 26.75in/68cm, painted, T51P/T51XW	80500724
Column Mount Kit, 13.75in/35cm, stainless steel, T51P/T51XW	80500725
Column Mount Kit, 26.75in/68cm, stainless steel, T51P/T51XW	80500726

Compatible with all existing columns for Champs-CD/CW11/CD3X/CKW

OHAUS CORPORATION

* 19A Chapin Road
P.O. Box 2033
Pine Brook, NJ 07058 USA

Tel: 800.672.7722

973.377.9000

Fax: 973.593.0359

www.ohaus.com

With offices throughout Europe,
Asia, and Latin America

* ISO 9001

Registered Quality Management System

80774416_A © Copyright Ohaus Corporation

